

# Onduline® Easyline

## EASY TO HANDLE, EASY TO FIX

Onduline EASYLINE sheets are lightweight, easy to handle and fix and their size is perfectly suited to any small timber framed building.



EASY



LIGHTWEIGHT



WATERTIGHT



ECO-RESPONSIBLE



Onduline® SEALSMART™

### Designed for easy fixing

EASYLINE benefits:

- Easy to cut, shape and fix
- Attractive colours and appearance
- Does not rot, rust or become brittle
- Lightweight and durable
- Eco friendly, made from recycled fibres




### Installation

Just follow these simple fixing instructions. First determine which specifications below match your building:

Pitch of the roof	5-10°	10-17°	17-27°	27°
Side overlap				
Distance between the battens - cm	Full decking	19	26.7	40
Front overlap cm				
Number of internal supports	Full decking	3	2	1
Effective sheet coverage	0.4 m <sup>2</sup>	0.43 m <sup>2</sup>	0.53 m <sup>2</sup>	0.53 m <sup>2</sup>
Number of nails per sheet	15	15	14	13

### Sheets

Sheets to be laid in a broken bond pattern to avoid a sheet build up at overlap. Always start your first row below the gutter, leaving maximum 7cm overhang. Begin the second row with half an ONDULINE EASYLINE sheet (cut lengthwise) and carry on with complete sheets. If a third row is required, start it with a complete sheet.

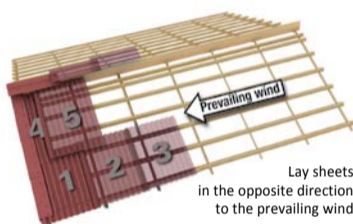

Lay sheets in the opposite direction to the prevailing wind

### Fixing

Sheets must be fixed onto each of their supporting battens by using the nails or screws specially designed for ONDULINE EASYLINE sheets.

Nail sheets at every corrugation at the eaves, overlaps, ridges and either side of the vertical joints – see Fig 1. Nail intermediate purlins as illustrated in Fig 2.

fig.1


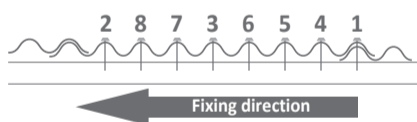


fig.2



### Ridge

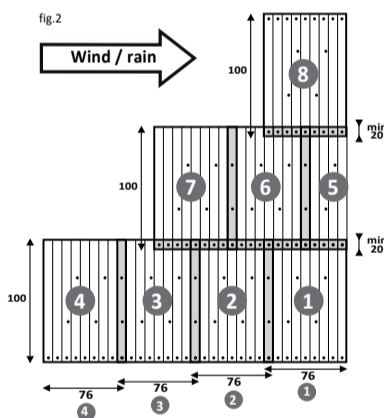

### Accessories

Onduline Nails and Screws



Ridge (l) 100 cm x (w) 48,5 cm



Characteristics	Length (cm)	Width (cm)	Corrugation (mm)	Thickness (mm)	Weight (kg)	Colour
ONDULINE EASYLINE sheet	100	76	95 / 38	2.6	≈ 2.24	green, red, black

\*The characteristics are for information purposes only


### Maintenance

To ensure a long life the roof should be cleared of leaves and debris and gutters cleaned regularly. Any branches in contact with the roof surface should be removed.

### Technical Note

EASYLINE sheets are not classified to External S.AA fire rating as required in UK Building Regulations for some classes of structure. In these cases they must be fixed on a fully supporting roof deck and the sheets coated with a proprietary AA surface paint treatment applied in accordance with the paint manufacturer's instructions.

### Tools required

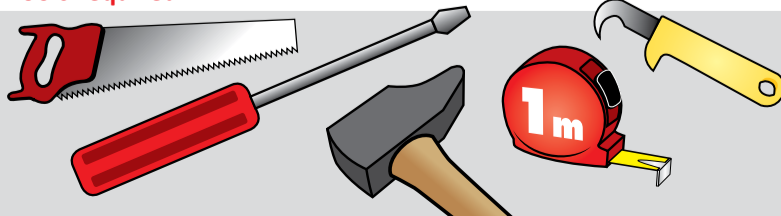

Onduline Building Products Ltd, Eardley House, 182-184 Campden Hill Road, Kensington, London W8 7AS.  
Tel No. 020 7727 0533 Email: enquiries@onduline.net Website www.onduline.co.uk